



单刀波动开关

Single-pole Rocker Switch

RS-1 Series

单刀带灯波动开关

Single-pole Illuminated Rocker Switch


IRS-1 Series



RoHS

型号说明 Ordering Information

IRS-101-1A3D-R/B

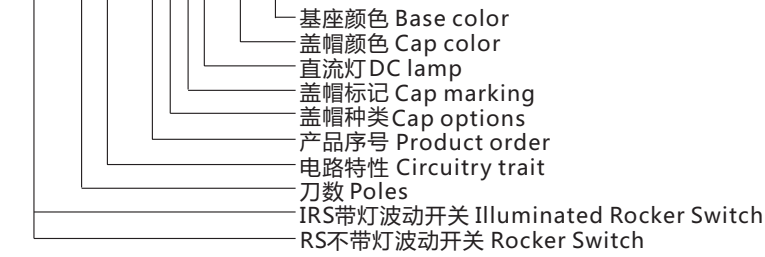

技术特性 Specification

- 1.规格 Rating:20A 125VAC;15A 250VAC;35A 12VDC
- 2.接触电阻 Contact Resistance:35mΩ max
- 3.绝缘电阻 Insulation Resistance:500VDC 100MΩ min
- 4.耐电压 Dielectric Strength:1500VAC, 1Minute
- 5.操作温度 Operating Temperature:-25°C ~ +85°C
- 6.电气寿命 Electrical Life:10,000 Cycles

电路特性Circuitry trait


01	ON	-	OFF
02	ON	-	ON
11	(ON)	-	OFF
03	ON	OFF	ON
13	ON	OFF	(ON)
23	(ON)	OFF	(ON)

() : 回弹指示 Indicates Momentary


盖帽颜色Cap color 基座颜色Base color 盖帽种类Cap options

黑 Black (B)
白 White (W)
红 Red (R)
黄 Yellow (Y)
绿 Green (G)
蓝 Blue (BL)
桔黄 Orange (O)
灰 Gray (GR)


黑 Black (B)
白 White (W)
灰 Gray (GR)

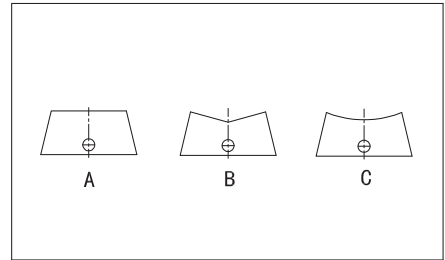

盖帽标记 Cap marking


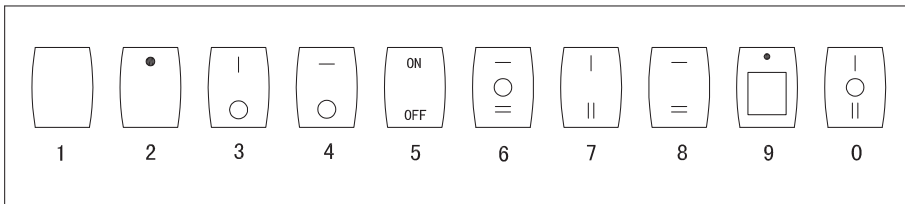


防水罩 Water proof cap

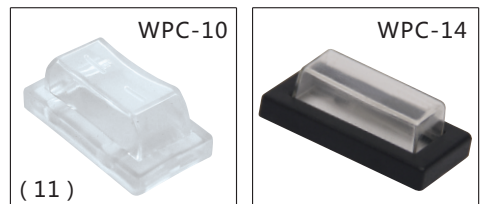



RS-101-1A ON-OFF

SPST 2P

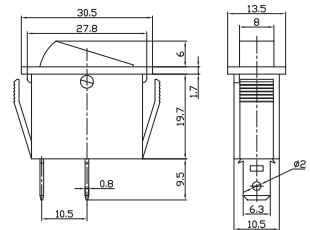

RS-101-1B ON-OFF



SPST 2P

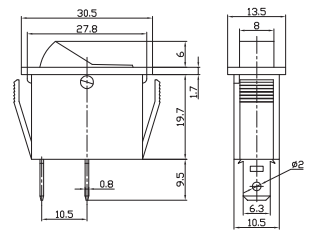

RS-101-1C ON-OFF

RS-111-1C (ON)-OFF

SPST 2P

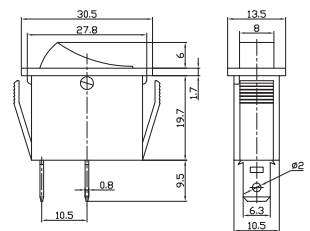



单刀波动开关





























Single-pole Rocker Switch

RS-1 Series

单刀带灯波动开关

Single-pole Illuminated Rocker Switch

IRS-1 Series

	<p>IRS-101-1A ON-OFF SPST 3P RS-102-1A ON-ON SPDT 3P</p>			
	<p>IRS-101-1B ON-OFF SPST 3P RS-102-1B ON-ON SPDT 3P</p>			
	<p>IRS-101-1C ON-OFF SPST 3P RS-102-1C ON-ON SPDT 3P</p>			
	<p>RS-101-2A ON-OFF SPST 2P</p>			
	<p>RS-101-2B ON-OFF SPST 2P</p>			
	<p>RS-101-2C ON-OFF SPST 2P</p>			
	<p>IRS-101-2A ON-OFF SPST 3P RS-102-2A ON-ON SPDT 3P</p>			



单刀波动开关

Single-pole Rocker Switch

RS-1 Series

单刀带灯波动开关

Single-pole Illuminated Rocker Switch

IRS-1 Series

	<p>IRS-101-2B ON-OFF SPST 3P</p> <p>RS-102-2B ON-ON SPDT 3P</p>			
	<p>IRS-101-2C ON-OFF SPST 3P</p> <p>RS-102-2C ON-ON SPDT 3P</p>			
	<p>RS-101-3A ON-OFF SPST 2P</p>			
	<p>RS-101-3B ON-OFF SPST 2P</p>			
	<p>RS-101-3C ON-OFF SPST 2P</p>			
	<p>IRS-101-3A ON-OFF SPST 3P</p> <p>RS-102-3A ON-ON</p> <p>RS-103-3A ON-OFF-ON SPDT 3P</p>			
	<p>IRS-101-3B ON-OFF SPST 3P</p> <p>RS-102-3B ON-ON</p> <p>RS-103-3B ON-OFF-ON SPDT 3P</p>			



单刀波动开关

Single-pole Rocker Switch

RS-1 Series



单刀带灯波动开关

Single-pole Illuminated Rocker Switch


IRS-1 Series





IRS-101-3C ON-OFF
SPST 3P
RS-102-3C ON-ON
RS-103-3C ON-OFF-ON
SPDT 3P

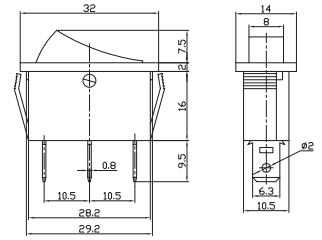



RS-101-11C ON-OFF
SPST 2P

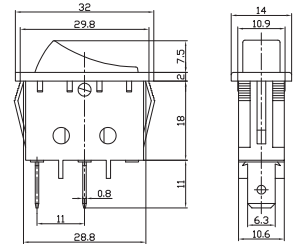



IRS-101-11C ON-OFF
SPST 3P
RS-102-11C ON-ON
RS-103-11C ON-OFF-ON
RS-123-11C (ON)-OFF-(ON)
SPDT 3P

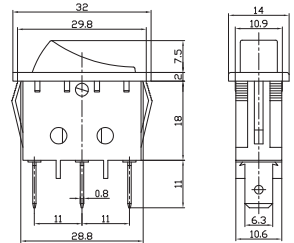


RS-101-16C ON-OFF
SPST 2P
RS-102-16C ON-ON
RS-103-16C ON-OFF-ON
SPDT 3P

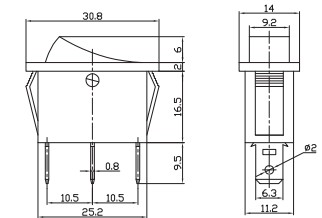

RS-1-101-2A ON-OFF
SPST 2P
IRS-1-2A ON-OFF
SPST 3P
RS-1-102-2A ON-ON
SPDT 3P
15A 125VAC; 10A 250VAC

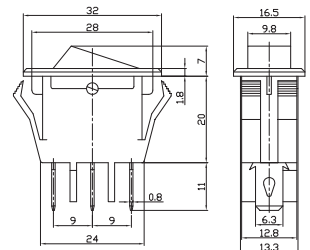

RS-1-101-2B ON-OFF
SPST 2P
IRS-1-2B ON-OFF
SPST 3P
RS-1-102-2B ON-ON
SPDT 3P
15A 125VAC; 10A 250VAC





单刀波动开关

Single-pole Rocker Switch

RS-1 Series



单刀带灯波动开关

Single-pole Illuminated Rocker Switch



IRS-1 Series





RS-1-101-2C ON-OFF
SPST 2P
IRS-1-2C ON-OFF
SPST 3P
RS-1-102-2C ON-ON
SPDT 3P
15A 125VAC; 10A 250VAC

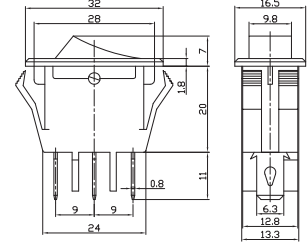



IRS-1-3B ON-OFF
15A 125VAC; 10A 250VAC
SPST 3P

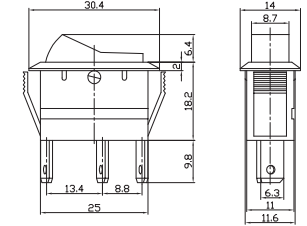



IRS-1-4C ON-OFF
15A 125VAC; 10A 250VAC
SPST 3P
L=7 ; 10

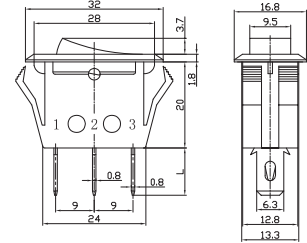



IRS-1-6C ON-OFF
15A 125VAC; 10A 250VAC
SPST 3P

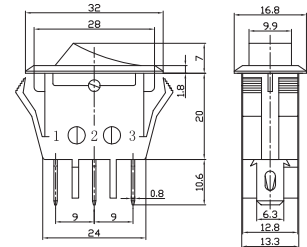

IRS-1-7A ON-OFF
15A 125VAC; 10A 250VAC
SPST 3P
L=7 ; 10



IRS-101E-1C ON-OFF
20A 125VAC; 15A 250VAC
SPST 3P





单刀波动开关

Single-pole Rocker Switch

RS-1 Series



单刀带灯波动开关

Single-pole Illuminated Rocker Switch



IRS-1 Series



IRS-1E-2C ON-OFF
15A 125VAC; 10A 250VAC
SPST 3P

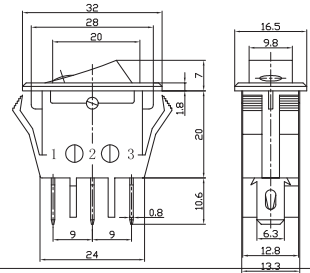

IRS-101E-3A ON-OFF
15A 125VAC; 10A 250VAC
SPST 3P

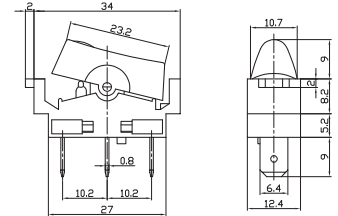


过载保护开关 Circuit-breaker Switch





IRS-R Series
IRS-B Series





IRS-1-R15 15A 125VAC/250VAC
IRS-1-R10 10A 125VAC/250VAC
IRS-1-R7 7A 125VAC/250VAC
ON-OFF SPST 3P
(Rocker Switch Breaker)

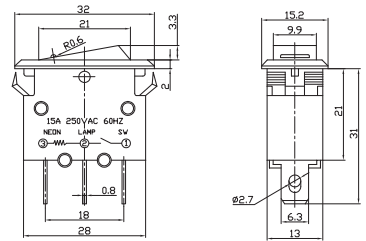

IRS-1-B15 15A 125VAC/250VAC
IRS-1-B10 10A 125VAC/250VAC
IRS-1-B7 7A 125VAC/250VAC
ON-OFF SPST 3P
(Push-button Switch Breaker)

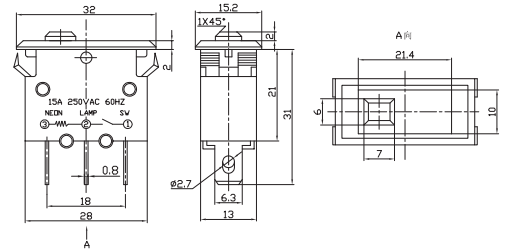

IRS-2-R15 15A 125VAC/250VAC
IRS-2-R10 10A 125VAC/250VAC
IRS-2-R7 7A 125VAC/250VAC
ON-OFF DPST 4P
(Double poles Rocker Switch Breaker)

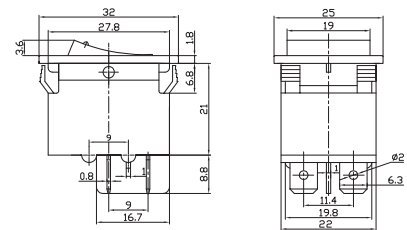

IRS-2-R15ST 15A 125VAC/250VAC
IRS-2-R10ST 10A 125VAC/250VAC
IRS-2-R7ST 7A 125VAC/250VAC
ON-OFF DPST 4P
(Double Poles Rocker Switch Breaker)

