



FLAT DISPLAY TECHNOLOGY CORPORATION


Smart Graphic Module

Refresh picture by command




Smart Graphic Module

一. Assemble the components according the illustration.

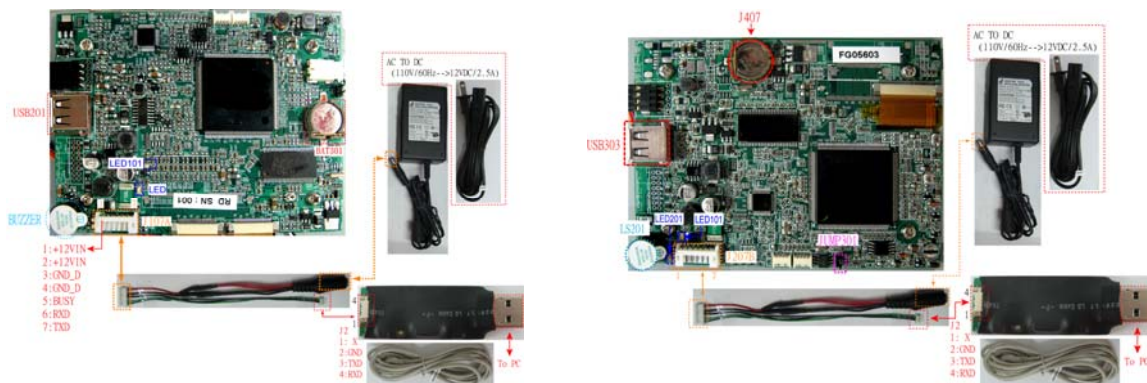

二. After install, open “Command Pilot”

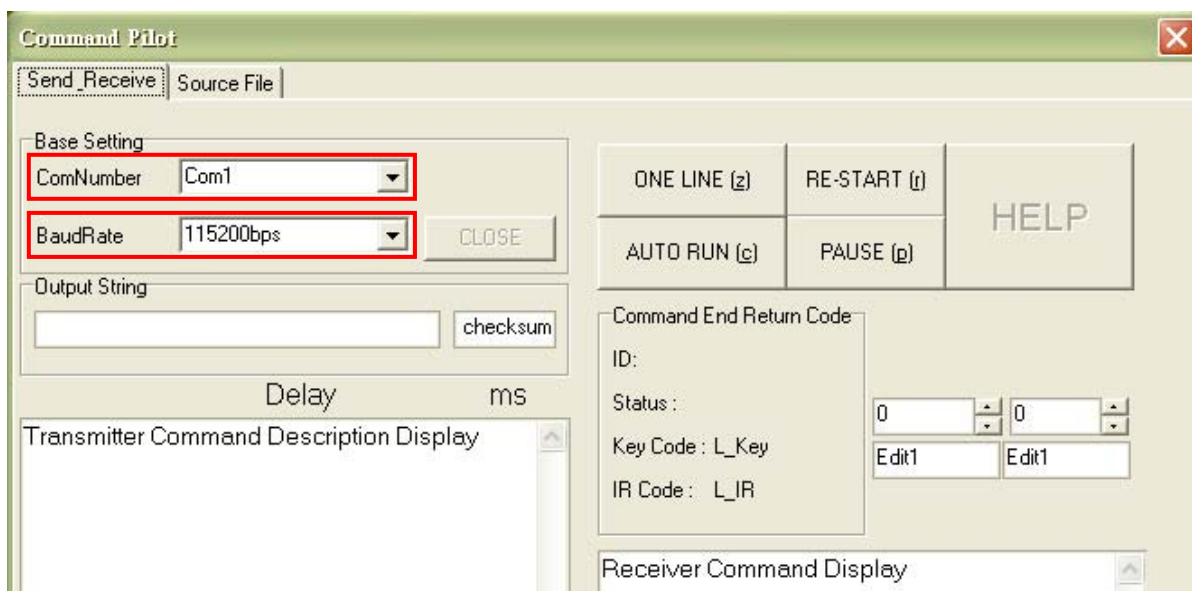

- Setting 「COM port number」 : to your PC for GTB ◦
- Setting 「Baud Rate」 : Please select “115200bps” ◦



Smart Graphic Module

- (1) Insert the USB Flash Disk with the file name, FGCIMAGE.BIN, to the SGM.
- (2) Input 『F1 04 F5 FE F3 F4』 in the marking area and then execute the refreshing graphic library process.

