

# G2306A

N-CHANNEL ENHANCEMENT MODE POWER MOSFET

BVDSS	30V
RDS(ON)	35mΩ
ID	5A

## Description

The G2306A utilized advanced processing techniques to achieve the lowest possible on-resistance, extremely efficient and cost-effectiveness device.


The G2306A is universally used for all commercial-industrial applications.

## Features

\*Capable of 2.5V gate drive

\*Lower on-resistance

## Package Dimensions

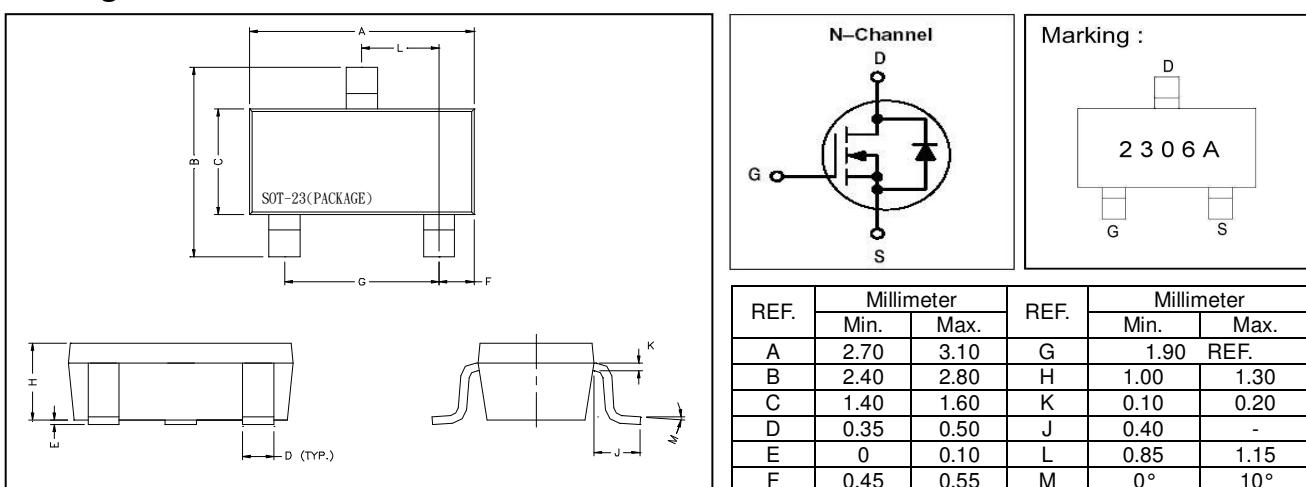

## Absolute Maximum Ratings

Parameter	Symbol	Ratings	Unit
Drain-Source Voltage	$V_{DS}$	30	V
Gate-Source Voltage	$V_{GS}$	$\pm 12$	V
Continuous Drain Current <sup>3</sup> , $V_{GS}@4.5V$	$I_D @ Ta=25^\circ C$	5	A
Continuous Drain Current <sup>3</sup> , $V_{GS}@4.5V$	$I_D @ Ta=70^\circ C$	4	A
Pulsed Drain Current <sup>1,2</sup>	$I_{DM}$	20	A
Power Dissipation	$P_D @ Ta=25^\circ C$	1.38	W
Linear Derating Factor		0.01	W/ $^\circ C$
Operating Junction and Storage Temperature Range	$T_j, T_{stg}$	-55 ~ +150	$^\circ C$

## Thermal Data

Parameter	Symbol	Ratings	Unit
Thermal Resistance Junction-ambient <sup>3</sup> Max.	$R_{thj-a}$	90	$^\circ C/W$

## Electrical Characteristics( $T_j = 25^\circ\text{C}$ Unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Drain-Source Breakdown Voltage	$\text{BV}_{\text{DSS}}$	30	-	-	V	$\text{V}_{\text{GS}}=0, \text{I}_D=250\mu\text{A}$
Breakdown Voltage Temperature Coefficient	$\Delta \text{BV}_{\text{DSS}} / \Delta T_j$	-	0.1	-	V/ $^\circ\text{C}$	Reference to $25^\circ\text{C}$ , $\text{I}_D=1\text{mA}$
Gate Threshold Voltage	$\text{V}_{\text{GS}(\text{th})}$	0.5	-	1.2	V	$\text{V}_{\text{DS}}=\text{V}_{\text{GS}}, \text{I}_D=250\mu\text{A}$
Forward Transconductance	$\text{g}_{\text{fs}}$	-	13	-	S	$\text{V}_{\text{DS}}=5\text{V}, \text{I}_D=5\text{A}$
Gate-Source Leakage Current	$\text{I}_{\text{GSS}}$	-	-	$\pm 100$	nA	$\text{V}_{\text{GS}}= \pm 12\text{V}$
Drain-Source Leakage Current( $T_j=25^\circ\text{C}$ )	$\text{I}_{\text{DS}(\text{SS})}$	-	-	1	uA	$\text{V}_{\text{DS}}=30\text{V}, \text{V}_{\text{GS}}=0$
Drain-Source Leakage Current( $T_j=70^\circ\text{C}$ )		-	-	25	uA	$\text{V}_{\text{DS}}=24\text{V}, \text{V}_{\text{GS}}=0$
Static Drain-Source On-Resistance	$\text{R}_{\text{DS}(\text{ON})}$	-	-	30	$\text{m}\Omega$	$\text{V}_{\text{GS}}=10\text{V}, \text{I}_D=5\text{A}$
		-	-	35		$\text{V}_{\text{GS}}=4.5\text{V}, \text{I}_D=5\text{A}$
		-	-	50		$\text{V}_{\text{GS}}=2.5\text{V}, \text{I}_D=2.6\text{A}$
		-	-	90		$\text{V}_{\text{GS}}=1.8\text{V}, \text{I}_D=1.0\text{A}$
Total Gate Charge <sup>2</sup>	$\text{Q}_g$	-	8.5	15	$\text{nC}$	$\text{I}_D=5\text{A}$ $\text{V}_{\text{DS}}=16\text{V}$ $\text{V}_{\text{GS}}=4.5\text{V}$
Gate-Source Charge	$\text{Q}_{\text{gs}}$	-	1.5	-		
Gate-Drain ("Miller") Change	$\text{Q}_{\text{gd}}$	-	3.2	-		
Turn-on Delay Time <sup>2</sup>	$\text{T}_{\text{d}(\text{on})}$	-	6	-	$\text{ns}$	$\text{V}_{\text{DS}}=15\text{V}$ $\text{I}_D=5\text{A}$ $\text{V}_{\text{GS}}=10\text{V}$ $\text{R}_G=3.3\Omega$ $\text{R}_D=3\Omega$
Rise Time	$\text{T}_r$	-	20	-		
Turn-off Delay Time	$\text{T}_{\text{d}(\text{off})}$	-	20	-		
Fall Time	$\text{T}_f$	-	3	-		
Input Capacitance	$\text{C}_{\text{iss}}$	-	660	1050	$\text{pF}$	$\text{V}_{\text{GS}}=0\text{V}$ $\text{V}_{\text{DS}}=25\text{V}$ $f=1.0\text{MHz}$
Output Capacitance	$\text{C}_{\text{oss}}$	-	90	-		
Reverse Transfer Capacitance	$\text{C}_{\text{rss}}$	-	70	-		

## Source-Drain Diode


Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Forward On Voltage <sup>2</sup>	$\text{V}_{\text{SD}}$	-	-	1.2	V	$\text{I}_S=1.2\text{A}, \text{V}_{\text{GS}}=0\text{V}$
Reverse Recovery Time <sup>2</sup>	$\text{T}_{\text{rr}}$	-	14	-	ns	$\text{I}_S=5\text{A}, \text{V}_{\text{GS}}=0\text{V}$
Reverse Recovery Charge	$\text{Q}_{\text{rr}}$	-	7	-	nC	$\text{dl}/\text{dt}=100\text{A}/\mu\text{s}$

Notes: 1. Pulse width limited by Max. junction temperature.


2. Pulse width  $\leq 300\mu\text{s}$ , duty cycle  $\leq 2\%$ .

3. Surface mounted on 1 in<sup>2</sup> copper pad of FR4 board;  $270^\circ\text{C}/\text{W}$  when mounted on Min. copper pad.


## Characteristics Curve

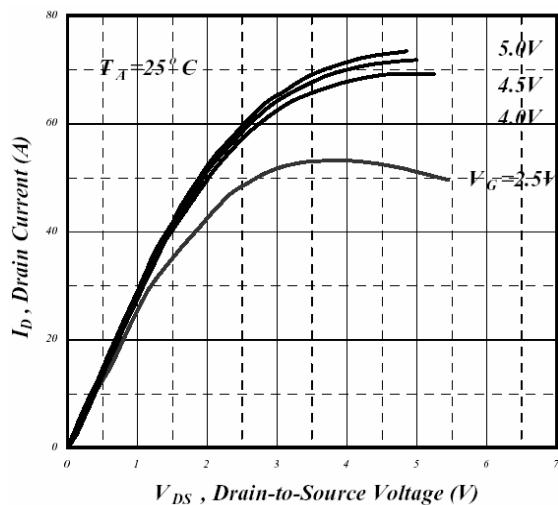


**Fig 1. Typical Output Characteristics**

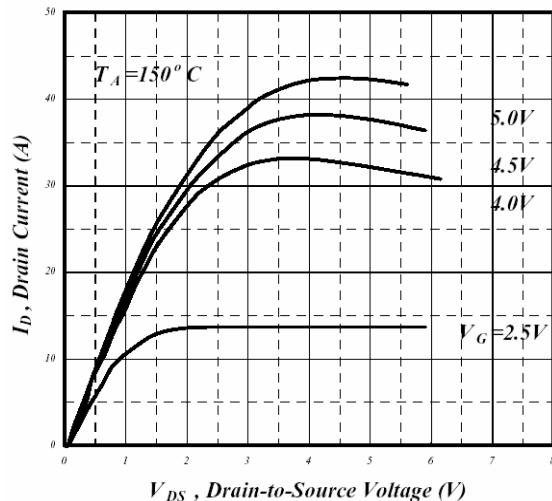


**Fig 2. Typical Output Characteristics**

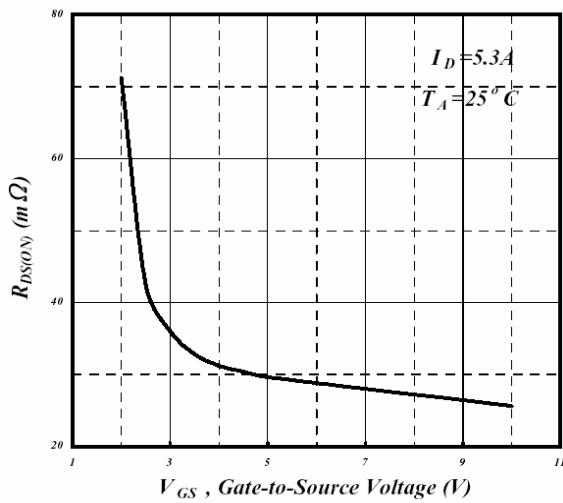


**Fig 3. On-Resistance v.s. Gate Voltage**

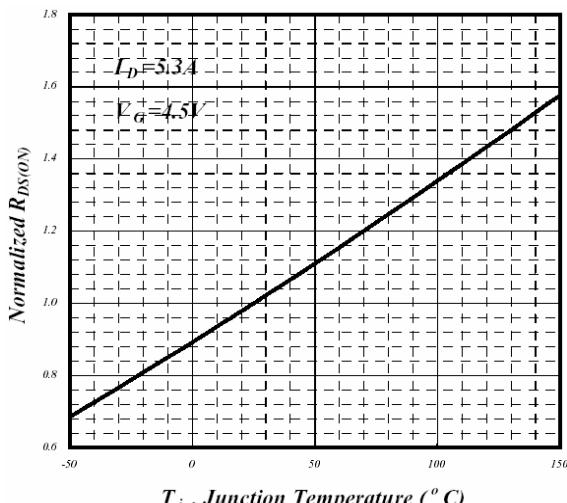

**Fig 4. Normalized On-Resistance v.s. Junction Temperature**

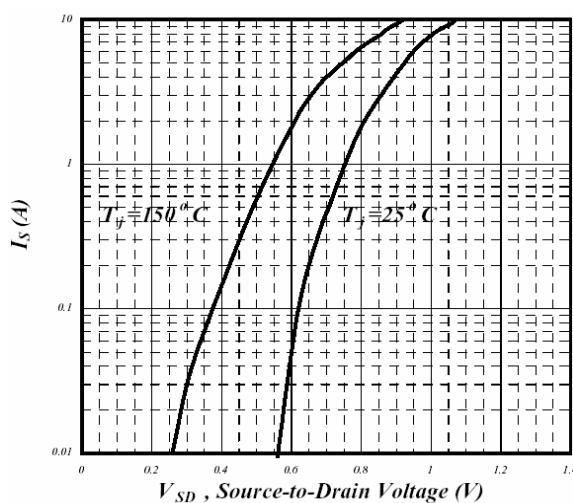

**Fig 5. Forward Characteristics of Reverse Diode**

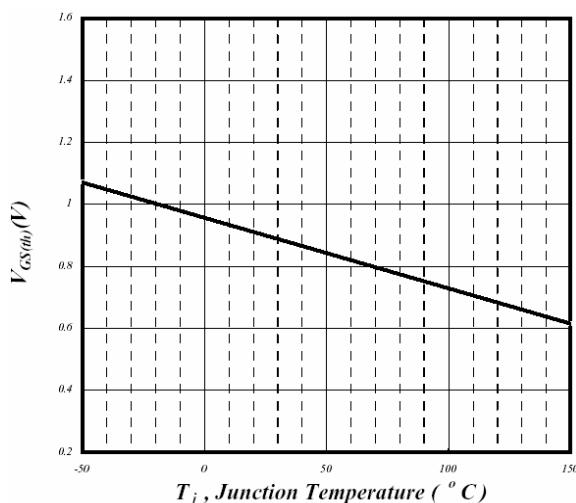

**Fig 6. Gate Threshold Voltage v.s. Junction Temperature**

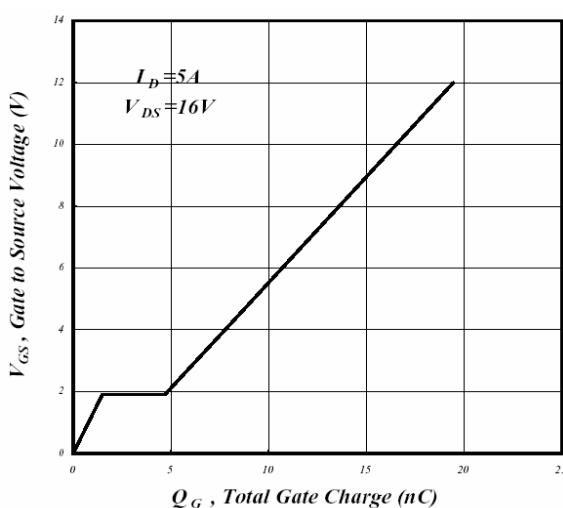


Fig 7. Gate Charge Characteristics

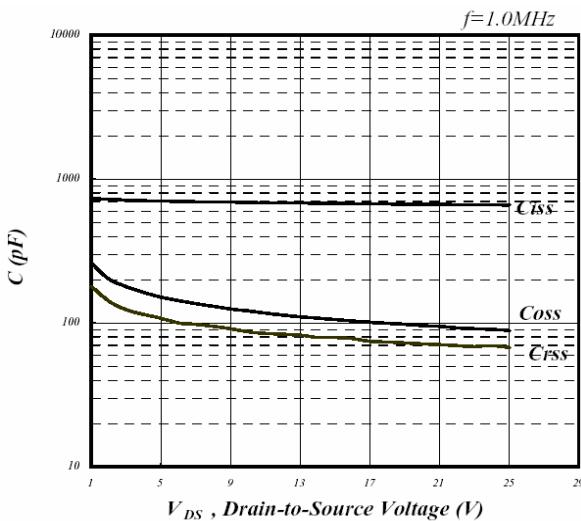


Fig 8. Typical Capacitance Characteristics

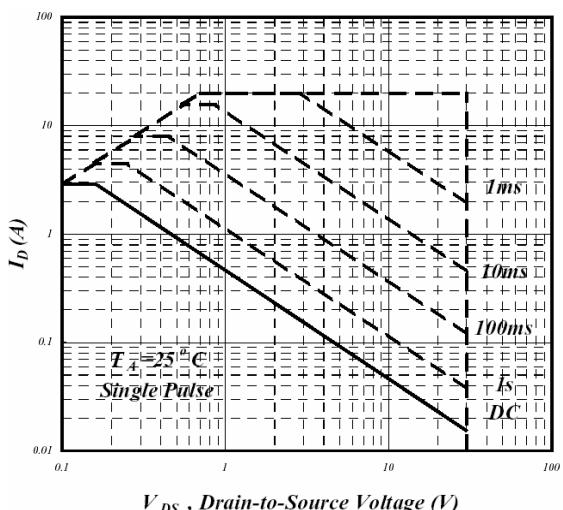


Fig 9. Maximum Safe Operating Area

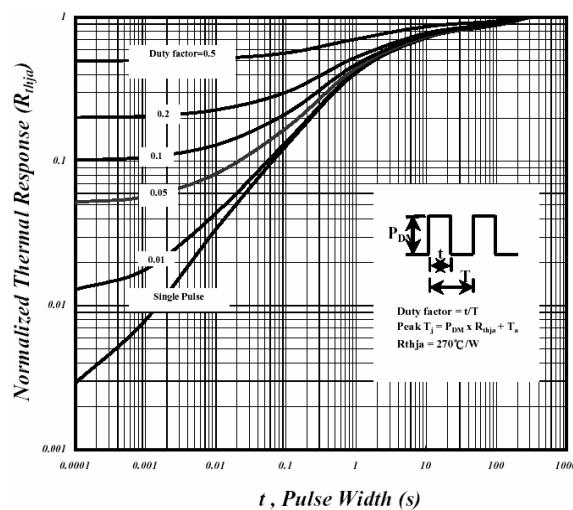


Fig 10. Effective Transient Thermal Impedance

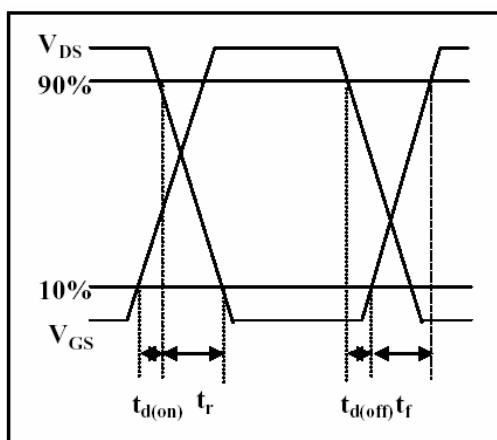


Fig 11. Switching Time Waveform

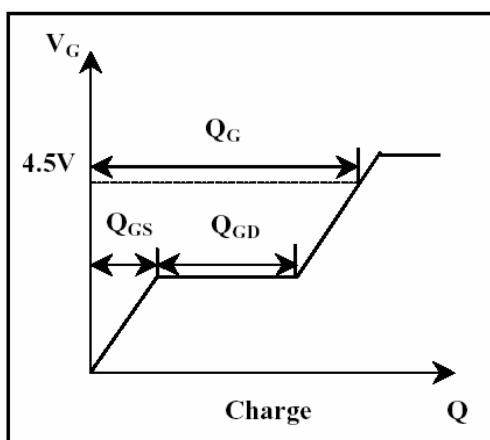


Fig 12. Gate Charge Waveform

**Important Notice:**

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

**Head Office And Factory:**

- Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.  
TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China  
TEL : 86-21-5895-7671 ~ 4 FAX : 86-21-38950165