


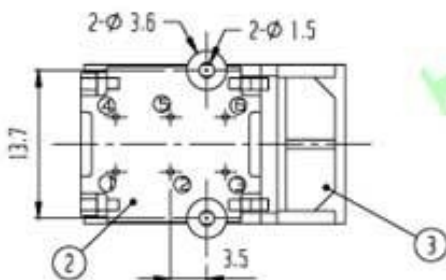



RoHS Compliance

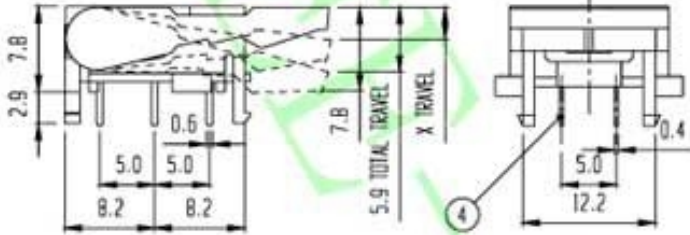

SCHMATIC



P.C.B. LAYOUT



7	CONTACT CASE	NYLON33L	1						
5	CONTACT	P B S	2	Ag PLATED	6	SPRING	S U S	1	
3	KNOB	P O M	1		4	TERMINAL	BRASS	6	Ag PLATED
1	COVER	P O M	1		2	FRAME	NYLON33L	1	
NO.	PART	MATERIAL	QTY	REMARKS	NO.	PART	MATERIAL	QTY	REMARKS

ISSUED	SPECIFICATION	TITLE: HOOK SWITCH							
	RATING: DC 48V 0.2A	MODEL NO: HS-2201							
	CONTACT RESISTANCE: 50mΩ max.	TOLERANCE	UNIT: MM	DWN.	<i>hro</i>				
	INSULATION RESISTANCE: 100MΩ AT 500V DC	UP TO 1.0:±0.1	SCALE: 2:1	CHK'D.	<i>m</i>				
	WITHSTAND VOLTAGE: AC 500V for 1 minute	1.0 TO 10.0:±0.2	VERSION: 02	APPD.	<i>[Signature]</i>				
	OPERATION FORCE: REFER ATTACH SPECIFICATION	OVER 10.0:±0.3	DRWG NO:						
SWITCHING LIFE: 100K cycles min.									
BY: <i>[Signature]</i>	SEE-PLUS INDUSTRIAL LTD.								
DATE: 03-DEC-2004									