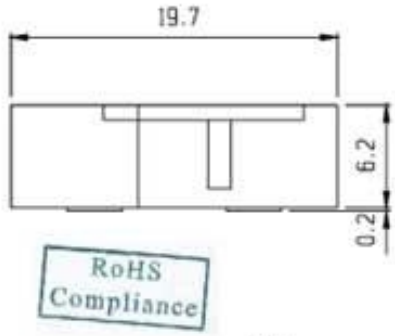


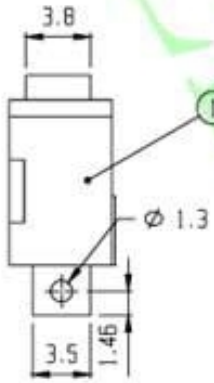


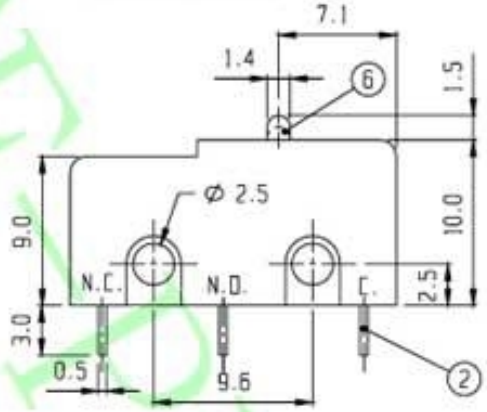


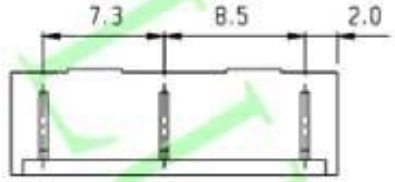


| NO. | PART | MATERIAL | QTY | REMARKS | NO. | PART | MATERIAL | QTY | REMARKS |
|---|---|---|---|---|---|---|---|---|---|
| 5 | SPRING PLATE | P B S | 1 | | 6 | PUSH BOTTON | P O M | 1 | |
| 3 | CONTACT | P B S | 1 | Ag PLATED | 4 | CONTACT POINT | Ag | | |
| 1 | FRAME | P O M | 1 | | 2 | TERMINAL | BRASS | 1 | Ag PLATED |

| ISSUED | SPECIFICATION | TITLE: MICRO SWITCH | | | |
|---|---|---|---|---|---|
| | RATING: AC 125V 1A | MODEL NO: MS-103 | | | |
| | CONTACT RESISTANCE: 30mΩ max. | | | | |
| | INSULATION RESISTANCE: 100MΩ AT 500V DC | TOLERANCE | UNIT: MM | DWN. | |
| | WITHSTAND VOLTAGE: AC 250V for 1 minute | UP TO 1.0:±0.1 | SCALE: 3:1 | CHK"D. | |
| | OPERATION FORCE: REFER ATTACH SPECIFICATION | 1.0 TO 10.0:±0.2 | VERSION: 01 | | |
| | SWITCHING LIFE: 100K cycles min. | OVER 10.0:±0.3 | DRWG NO: | APPD. | |
| BY: | SEE-PLUS INDUSTRIAL LTD. | | | | |
| DATE: 24-AUG-2006 | | | | | |

Copyright© SEE_PLUS inductrial ltd.