

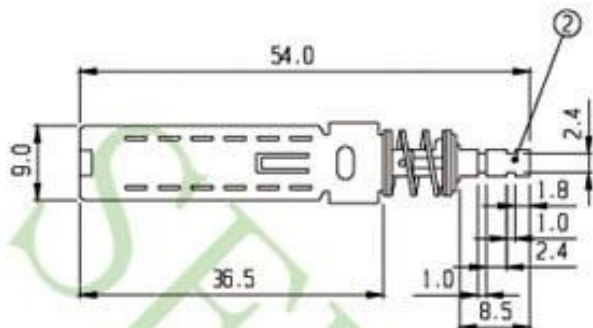


SCHMATIC



RoHS Compliance

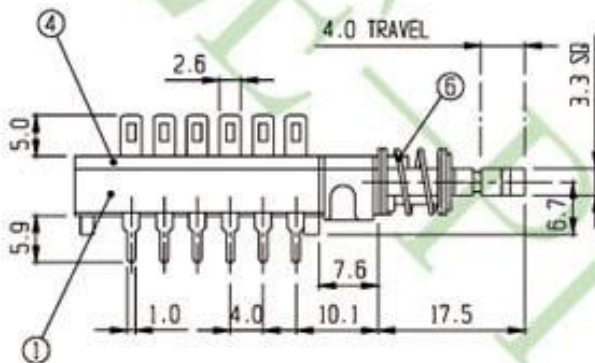

5	CONTACT	BRASS	4	Ag PLATED	6	SPRING	STEEL WIRE	5	
3	TERMINAL	BRASS	12	Ag PLATED	4	TERMINAL BASE	NYLON	1	
1	FRAME	P C	1		2	KNOB	P O M	1	
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED SPECIFICATION TITLE: PUSH BUTTON SWITCH (4P2T) (UNLOCK)



RATING: DC 30V 0.5A
 CONTACT RESISTANCE: 30mΩ max.
 INSULATION RESISTANCE: 100MΩ at 500V DC
 WITHSTAND VOLTAGE: AC 500V for 1 minute
 OPERATION FORCE: REFER ATTACH SPECIFICATION
 SWITCHING LIFE: 10K cycles min.

MODEL NO: PBS-42H01-F18
 TOLERANCE UNIT: MM DWN.
 UP TO 1.0: ±0.1 SCALE: 1.5:1 CHK'D.
 1.0 TO 10.0: ±0.2 VERSION: 02
 OVER 10.0: ±0.3 DRWG NO: APPD.

BY:
 DATE: 12-MAY-2006

SEE-PLUS INDUSTRIAL LTD.

