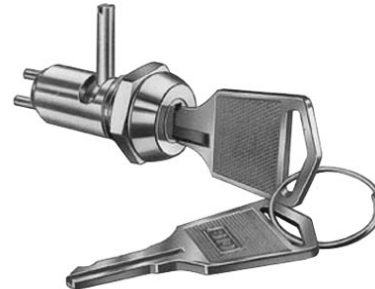


S1096
KEYLOCK SWITCH
DESCRIPTIONS:

- Zinc alloy die cast housing and cylinder.
- Stainless steel capped bezel.
- Bright chrome plated standard.
- 4 disc tumbler mechanism.
- Brass keys, nickel plated.
- "L" dimension 13mm standard; other dimensions available upon request.
- Dual-functioned Key Lock Switch.
- Key may be withdrawn in one or both positions.
- Silver plated contacts and terminals.
- 2 position (off-on) 2 terminals.
- Hex nut or speed clip mounted.
- 20 combinations available.


KEY-PULL FIGURES

○-Off Position

┃-Indicates Key-Pull

●-Indicates No Key-Pull



Fig. No.	Lock Number	Pole	Positions	Terminals	Key Pulls	Turn	⬆	⬅	Type
1	S1096-1	1	2	2	1	90 °	Off	On	SPST
2	S1096-2	1	2	2	2	90 °	Off	On	SPST

Unit: mm

HOLE SIZE

