

ULO-MDS428A

Type: Dip Switch, Pitch: 2.54MM, Operating life: 2000 Operations Cycles Per Switch, Voltage rating: 500VAC/1 Minute, Housing material: Engineering Plastics


Basic information

| | |
|----------------------|------------------|
| Product ID | ULO-SS428A |
| Contact impedance | 100mΩ Max |
| Insulation impedance | 1000MΩ Min |
| Withstand voltage | 250V AC 1 Minute |
| Service life | 2000 Cycl e Min |
| Storage temperature | -45°C~~+110°C |

Material Data

| | |
|--|----------------|
| Insulation material | Thermoplastics |
| Insulation material group | I |
| Flame retardant grade, UL94 compliance | UL94V-0 |
| Contact material | Copper alloy |
| Surface characteristics | - |

N=Number of contacts

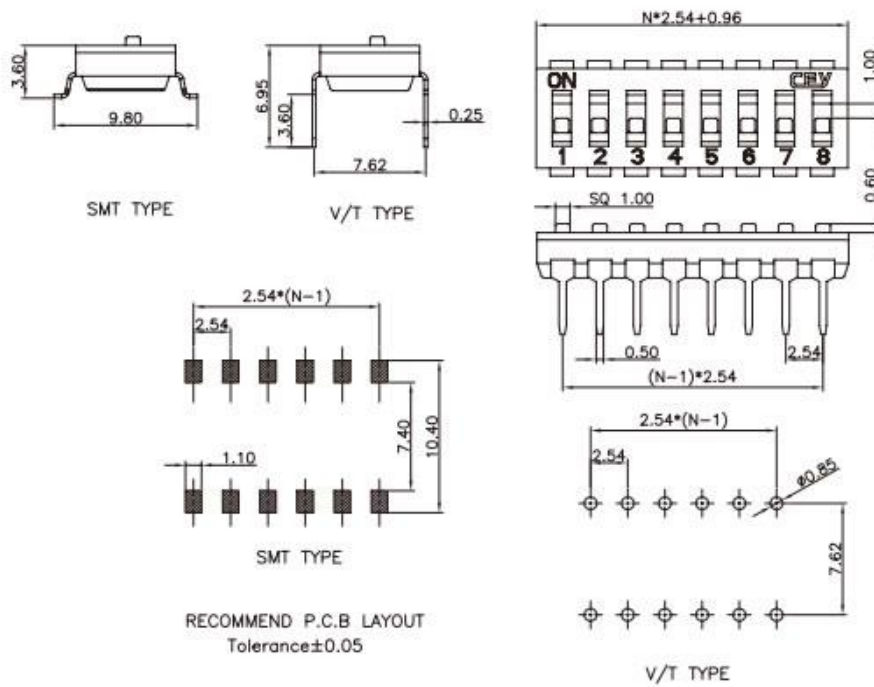

HOW TO ORDER

ULO-MDS428A

— X X X X X

- Packing type
B: tube
R: tape & reel
T: tray
- Acuator color
W: White
- Housing color
B: Black
- Mounting type
S: SMT type
V: V/T type
- No. of contacts
2 3 4 5 6 7
8 9 10 11 12