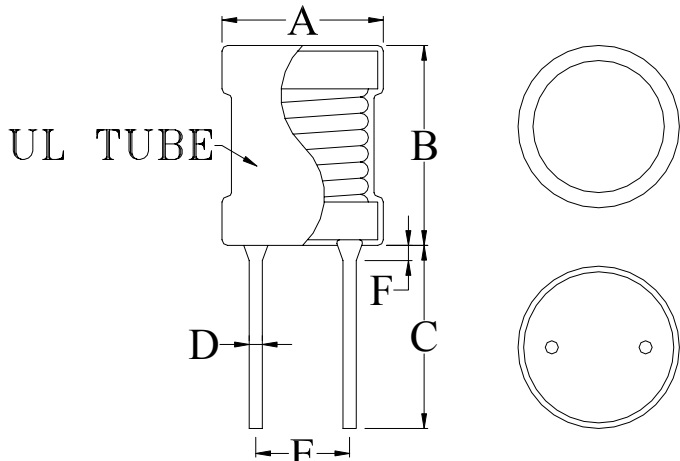


SPECIFICATION FOR APPROVAL

COMMODITY	PK CHOKE		SPEC NO.	SP-060824021
ITEM	JPK 0810-221K	Green	版本：A	表單編號：TRR-002

(1) DIMENSION: (UNIT: mm)			DIM.	TOL.
	A	9.5	MAX.	
	B	11.5	MAX.	
	C	16.0	± 3.0	
	D	0.65	±0.05	
	E	5.0	±0.5	
	F	3.0	MAX.	
	G			
	H			
	I			
	J			

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
INDUCTANCE	220 ± 10%	μH	☒ AGILENT 4294A Precision Impedance Analyzer. ☐ AGILENT 4285A Precision L.C.R. Meter. ☐ HP-4286A RF L.C.R. Meter. ☒ ZENTECH 3302 Automatic Components Analyzer. ☐ ZENTECH 101 L.C.R. Meter. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ ZENTECH 502AC Resistance Merter. ☐ ADEX AX-1155B DC Low Ohm Meter.
TEST FREQUENCY	1	KHz	
TEST VOLT	0.25	V	
RDC	380	(max) mΩ	
Isat *1	1.15	(max) A	
Irms *2	1.22	(max) A	

REMARK :

- Inductance drop = 10% typ at Isat.
- ΔT = 40°C rise typ at Irms.

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			



JANTEK ELECTRONICS CO.,LTD

TEL : 886-2-2689-4971 FAX : 886-2-2689-4260
 E-mail : jantek@jantek-elec.com.tw
 Web-Site : www.jantek-elec.com.tw